





Big Grips - Hot Dip Galvanized

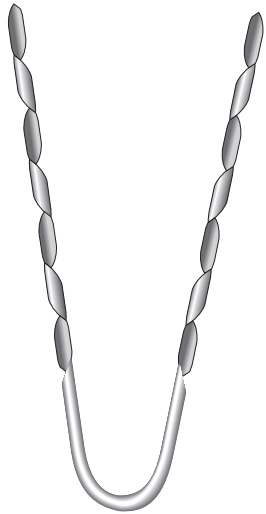

Description	Part Number	Weight
3/16" Galvanized Big-Grip with end sleeve	BG2142	33/100
1/4" Galvanized Big-Grip with end sleeve	BG2144	50/100
5/16" Galvanized Big-Grip with end sleeve	BG2146	82/100
3/8" Galvanized Big-Grip with end sleeve	BG2147	112/100
7/16" Galvanized Big-Grip with end sleeve	BG2148	188/100
1/2" Galvanized Big-Grip with end sleeve	BG2115	315/100
9/16" Galvanized Big-Grip with end sleeve	BG2116	480/100
5/8" Galvanized Big-Grip with end sleeve	BG2111	650/100
3/4" Galvanized Big-Grip with end sleeve	BG2112	1080/100
7/8" Galvanized Big-Grip with end sleeve	BGMS7023	1125/100
1" Galvanized Big-Grip with end sleeve for use with 1" EHS and with 1" Bridgestrand when capacity does not exceed 104.5 KIPS	BGMS7047	2540/100
1" Rocket Socket with Ear Clamp for use with 1" Bridgestrand when capacity does not exceed 122KIPS	RK0516	46
Guy Link, required for Rocket Socket	GL11/4	73/100

End sleeves must be used on all Big-Grips. See Drawing B700607 for procedure to apply end sleeve.
 Oversized heavy duty thimbles must be used with all Big-Grips. Thimbles are not required when using Rocket Sockets.
 Rocket Socket requires Guy Link at guy wire to tower connection.

End Sleeves - Hot Dip Galvanized



Description	Part Number	Weight
3/16"	GC65303	3/100
1/4"	GC65136	3/100
5/16"	GC65128	3/100
3/8"	GC65264	5/100
7/16"	GC65265	7/100
1/2"	GC65266	10/100
9/16"	GC65267	11/100
5/8"	GC65268	14/100
3/4"	GC65269	21/100
7/8"	GC65270	27/100
1"	Gc65271	32/100

Guy Wire - Hot Dip Galvanized



Description	Part Number	Weight
3/16" EHS x 500' coil (3,990 lbs. breaking strength)	3/16EHS500	73/MFT
3/16" EHS x 1,000' coil (3,990 lbs. breaking strength)	3/16EHS1000	73/MFT
3/16" EHS x cut length (3,990 lbs. breaking strength)	3/16EHS	73/MFT
1/4" EHS x 500' coil (6,650 lbs. breaking strength)	1/4EHS500	120/MFT
1/4" EHS x 1,000' coil (6,650 lbs. breaking strength)	1/4EHS1000	120/MFT
1/4" EHS x cut length (6,650 lbs. breaking strength)	1/4EHS	120/MFT
5/16" EHS x cut length (11,200 lbs. breaking strength)	5/16EHS	205/MFT
3/8" EHS x cut length (15,400 lbs. breaking strength)	3/8EHS	273/MFT
7/16" EHS x cut length (20,800 lbs. breaking strength)	7/16EHS	399/MFT
1/2" EHS x cut length (26,900 lbs. breaking strength)	1/2EHS	517/MFT
9/16" EHS x cut length (35,000 lbs. breaking strength)	9/16EHS	671/MFT
5/8" EHS x cut length (42,400 lbs. breaking strength)	5/8EHS	813/MFT
3/4" EHS x cut length (58,300 lbs. breaking strength)	3/4EHS	1155/MFT
7/8" EHS x cut length (79,700 lbs. breaking strength)	7/8EHS	1581/MFT
1" Structural strand x cut length (122,000 lbs. breaking strength)	1BS	2100MFT

To arrive at safe working load for guy wire appropriate safety factor must be applied.
 There is an additional charge for coiling large quantities of individual length guy wire onto wooden spools for shipment.
 ROHN reserves the right to charge for cutting.